

## SAUTER Declaration on materials and the environment

### Product



Type	<b>EY-AS524F001 EY-AS525F001 / F005</b>
Designation	<b>Modu525 automation station</b>
Product range	<b>EY-modulo 5</b>
Product group of eco-balance	<b>3, controllers and sensors</b>

### Manufacturer

Fr. Sauter AG  
Im Surinam 55, CH-4058 Basel

### Management system certified according to

	Since	With
ISO 9001	<b>10 Aug. 1993</b>	<b>SQS</b>
ISO 9001:2000	<b>10 Aug. 2002</b>	<b>SQS</b>
ISO 14001:2004	<b>10 Aug. 2005</b>	<b>SQS</b>
OHSAS 18001:1999	<b>10 Aug. 2005</b>	<b>SQS</b>

### Environmentally-compatible product design

Basis	Fr. Sauter AG management system
Process	Business process <ul style="list-style-type: none"> <li>• Product innovation</li> <li>• Ecological accounting</li> </ul>

<b>Product description</b>	CE conformity	
	Function, operation, maintenance, servicing	PDS 92.016
<b>Environmental risk</b>	Fire protection according to	EN 60695-2-11, EN 60695-10-2
	Fire load <sup>1</sup>	22.2 – 22.5 MJ
	Hazardous substances <sup>2</sup>	RoHS conforming to
	Banned substances (see link below)	2011/65/EU and REACH 1907/2006/EC
	Parts containing halogen (causing corrosive smoke)	None
	Liquids polluting the aquatic environment	None
<b>Packaging</b> <sup>3</sup>	Explosive substances	None
	Cardboard PAP 20	72.0 g
	Paper PAP 20	11.0 g

## Materials

	Total weight of product <sup>4</sup>	804.2 – 840.0 g	Material Safety Data Sheet (MSDS)	EU waste code <sup>5</sup>
<b>Plastic</b>				
PC	22.5 g		Yes	20 01 39
PC+ABS	382.3 g		Yes	20 01 39
POM	4.5 g		Yes	20 01 39
<b>Metal</b>				
None				
<b>Printed circuit board</b>				
Assembled PCB, lead-free solder	375 – 430.7 g		Not required	20 01 36
<b>Various</b>				
None				
<b>Special components</b>				
Battery CR2032 (component of PCB)	3 g		Not required	20 01 34
<b>Note</b>				
All components are silicone-free				

1 See **Remarks** on last page

2 Only applies to electrical devices

3 Directive 94/62/EC and follow-on document, ruling 97/129/EC

4 See **Remarks** on last page

5 Directive 75/442/EEC and follow-on document, ruling 2001/118/EC




### Note

The following materials balance and the calculation of the environmental impact relate to type EY-AS525F001.

## Materials balance

---

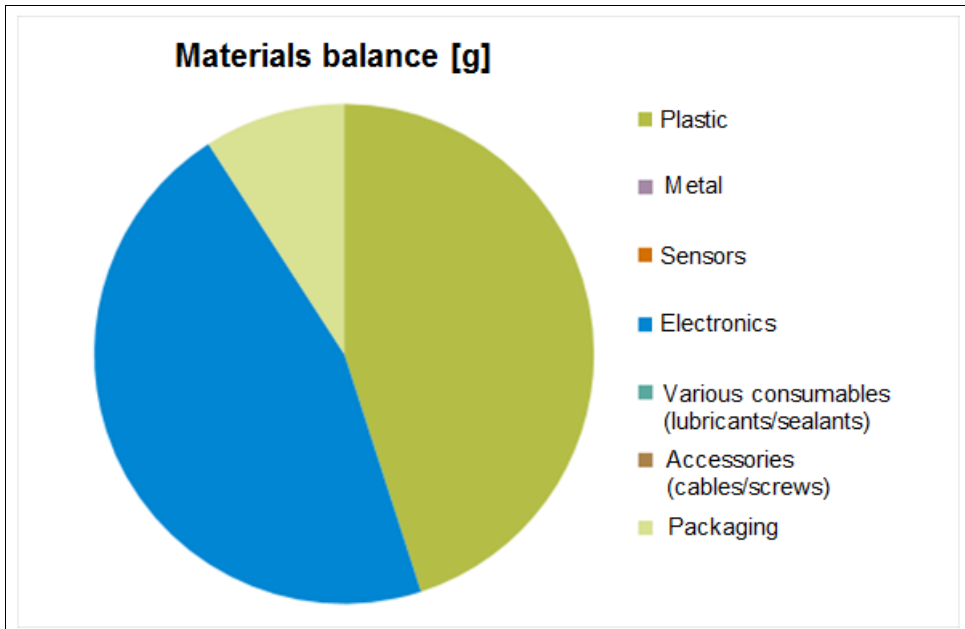

## Energy requirement in the utilisation phase

---

Power requirement for component

Average power consumption 5.0 W

Typical energy consumption per year 42.7 kWh/a


The energy requirement evaluation was performed for a typical utilisation scenario. The European electricity mix from ecoinvent 2.2 was used to evaluate the power consumption in the utilisation phase.

## Calculation of the environmental impact

---

Evaluation over the entire life stage of 8 years in a typical utilisation scenario. The results shown are based on a method of ecological scarcity that combines various environmental effects into an “environmental impact points” key figure. The method is based on Switzerland’s environmental targets and evaluates the individual effects depending on the “Distance to Target”.

Indicator	Unit	Production	Utilisation	Disposal	Total
Global warming potential (GWP), IPCC 2007, 100a	kg CO2 eq.	22.3	187.8	0.8	210.9
Cumulative energy demand (non-renewable resources)	MJ eq.	409	3'810	4.0	4'220
Cumulative energy demand (renewable resources)	MJ eq.	32.8	288	0.05	321
Acidification potential, CML 2001	kg SO2 eq.	4.71E-01	7.74E-01	7.59E-04	1.25E+00
Eutrophication potential, CML 2001	kg PO4-- eq.	2.32E-01	6.15E-01	4.05E-04	8.47E-01
Ozone creation potential, CML 2001	kg C2H4 eq.	2.00E-02	3.12E-02	3.34E-05	5.12E-02
Ecological scarcity 2006: Total	UBP	67'400	191'700	2'560	262'000

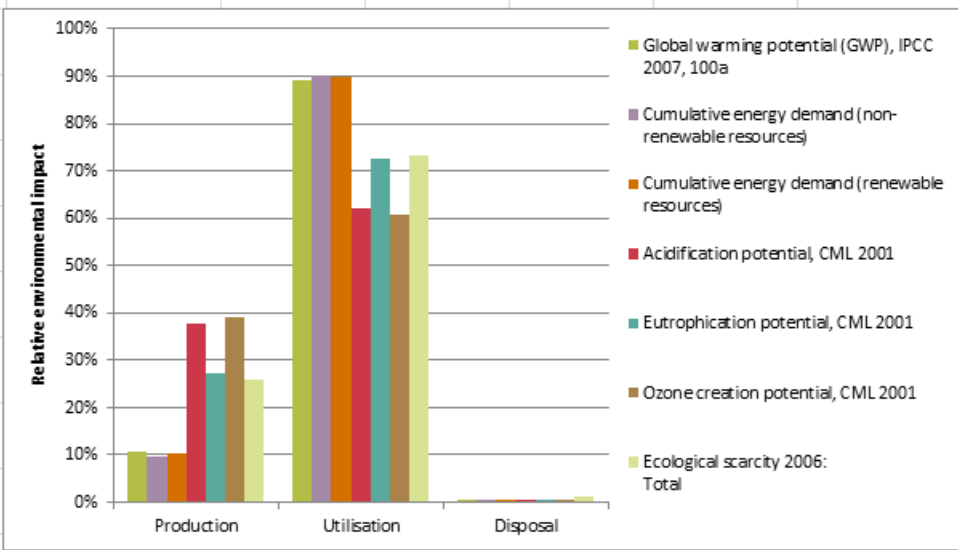

The relationship of the contributions made by the utilisation in comparison to those made by the reduction and disposal depends on the intensity of the utilisation (utilisation scenario).



## Disposal

### Product:

The device must be disposed of as waste from electrical and electronic equipment (electrical/electronic scrap) and must not be disposed of as household waste. This applies in particular to the assembled PCB.

Special treatment for special components may be compulsory by law or may make ecological sense.

### Packaging:

Recyclable

The local and currently valid laws (WEEE2012/19/EU) must be observed.

### Special information:

None

## Comments

### <sup>(1)</sup> Fire load, depending on type:

EY-AS524F001 21.3 MJ

EY-AS525F001 22.2 MJ

EY-AS525F005 22.5 MJ

### 2) Weight, depending on type:

EY-AS524F001 804.2 g

EY-AS525F001 826.0 g

EY-AS525F005 840.0 g

## How the environment benefits

With these products we make a significant contribution to energy savings in buildings and to reducing global warming.

In the Green Building area, our products ensure that customer requirements are fulfilled optimally and that there is maximum cost efficiency over the entire building life-cycle.

## Extent of applicability

This declaration is an environmental declaration based on ISO 14025 and describes the environmental impact of the product over its entire life stage. The declaration is made in a compact form without an external check or registration.

The data gathered with existing data inventories for production processes has been evaluated from the ecoinvent 2.2 European database.

For the determination of the energy requirement during the utilisation phase of the product, standard HVAC applications and average climatic conditions in Switzerland were assumed, based on the ecological accounting for the corresponding product group.



### Disclaimer: This declaration is for information purposes only.

Deviations from the information it contains can occur without notification. Fr. Sauter AG explicitly rules out any liability for any consequences that may result due to the above information.



Your local SAUTER representative will provide further information on environmental aspects, and specifically on disposal.

## References

---

Ecoinvent 2010 ecoinvent data v2.2, Swiss Centre for Life Cycle Inventories, Dübendorf

FOEN 2008 Eco-balances: method of ecological scarcity – eco-factors 2006, FOEN